

User's manual of Gas Filter

WARNING

- Please read combined with **MOST R-FLOW** unit user instruction, pls make sure you are fully understood the manual before use.
- This gas filter must be always used together with **MOST R-FLOW** particle filter. The gas filter give additional protection against certain gaseous environment. (See the table below).
- The filter assembly must be installed properly as per instruction guide.
- The particle filter and gas filter cannot be cleaned. Replace with new ones if damaged or dirty.
- Storage temperature range: -10 °C to +55 °C , R.H. < 85%.

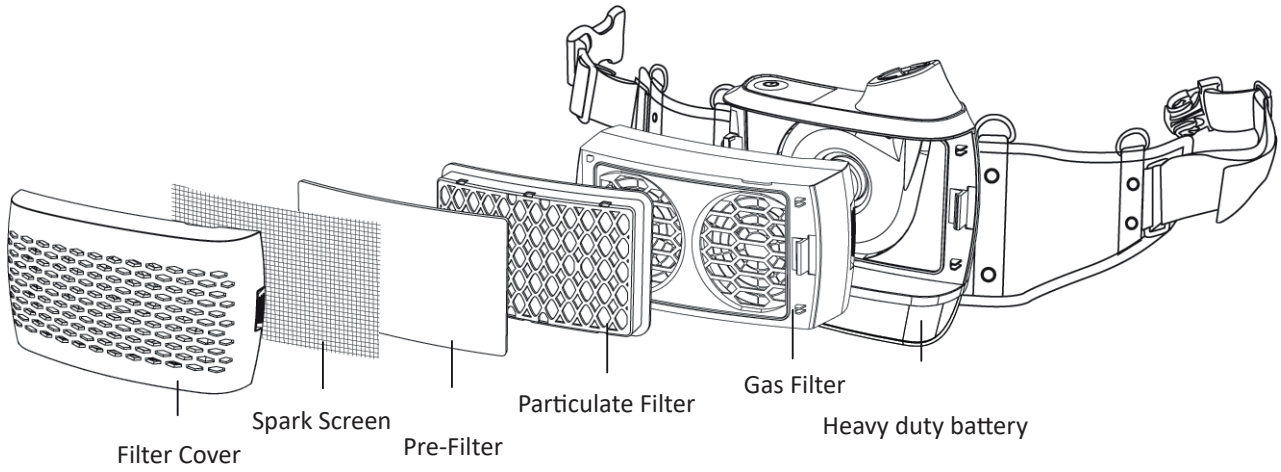

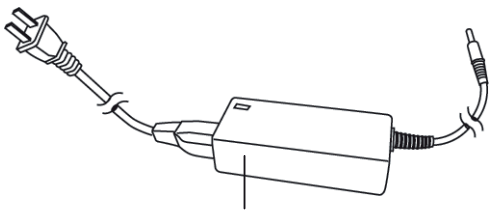

Fast-charging battery charger,
2 hours to full state.

Battery type	Heavy duty Li-ion battery
Battery duration	11 h-170 L/min; 7.5 h-210 L/min
Battery charge time	2 hours
Battery life	550 charges

MARKINGS ON THE EQUIPMENT

Marking	Part No.	Color Code	Protection Against
P (R SL)	72 00 912201	White	Particulates (R=replaceable, SL=test against sodium chloride and paraffin oil)
A1B1E1K1	72 00 912219	Brown / Grey / Yellow / Green	Organic gases / Inorganic gases / Sulfur dioxide, acidic gases / Ammonia and organic ammonia derivatives

Read the instruction before use.

Expiry date year / month.

CE 0194 The particle and gas filter are marked according to EN12941:1998.