


KÖCO PT

DIN EN ISO 13918

Threaded stud with flange and ignition tip

- Part.no. applies to steel, grade 4.8, copper plated
 - Other types and dimensions upon request.
- Not a part from warehouse, minimum quantities are needed.

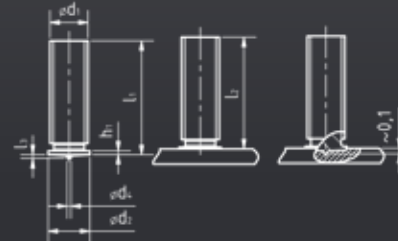

d_1	l_1	d_2	d_4	l_3	max. h_2	h_1	Part-no.	Mass kg/100	Chuck
M3	6	4,5	0,6	0,55	0,6	0,7 - 1,4	100-0001-103	0,031	351-7003-000
	8						100-0003-103	0,039	
	10						100-0005-103	0,047	
	12						100-0006-103	0,056	
	16						100-0008-103	0,072	
	20						100-0009-103	0,089	
M4	8	5,5	0,65	0,55	0,5	0,7 - 1,4	100-0032-103	0,067	351-7004-000
	10						100-0033-103	0,082	
	12						100-0034-103	0,097	
	16						100-0036-103	0,127	
	20						100-0038-103	0,156	
	25						100-0039-103	0,193	
M5	10	6,5	0,75	0,8	1	0,7 - 1,4	100-0067-103	0,130	351-7005-000
	12						100-0068-103	0,153	
	16						100-0071-103	0,201	
	20						100-0072-103	0,248	
	25						100-0073-103	0,307	
	30						100-0074-103	0,366	
M6	10	7,5	0,75	0,8	1	0,7 - 1,4	100-0101-103	0,186	351-7006-000
	12						100-0103-103	0,220	
	16						100-0105-103	0,287	
	20						100-0106-103	0,355	
	25						100-0108-103	0,439	
	30						100-0109-103	0,523	
M8	12	9	0,75	0,85	1,5	0,8 - 1,4	100-0136-103	0,387	351-7008-000
	16						100-0138-103	0,509	
	20						100-0139-103	0,632	
	25						100-0140-103	0,789	
	30						100-0142-103	0,938	

$l_2 \approx l_1 - 0,3 \text{ mm.}$

