



# ERGOCUT A 101

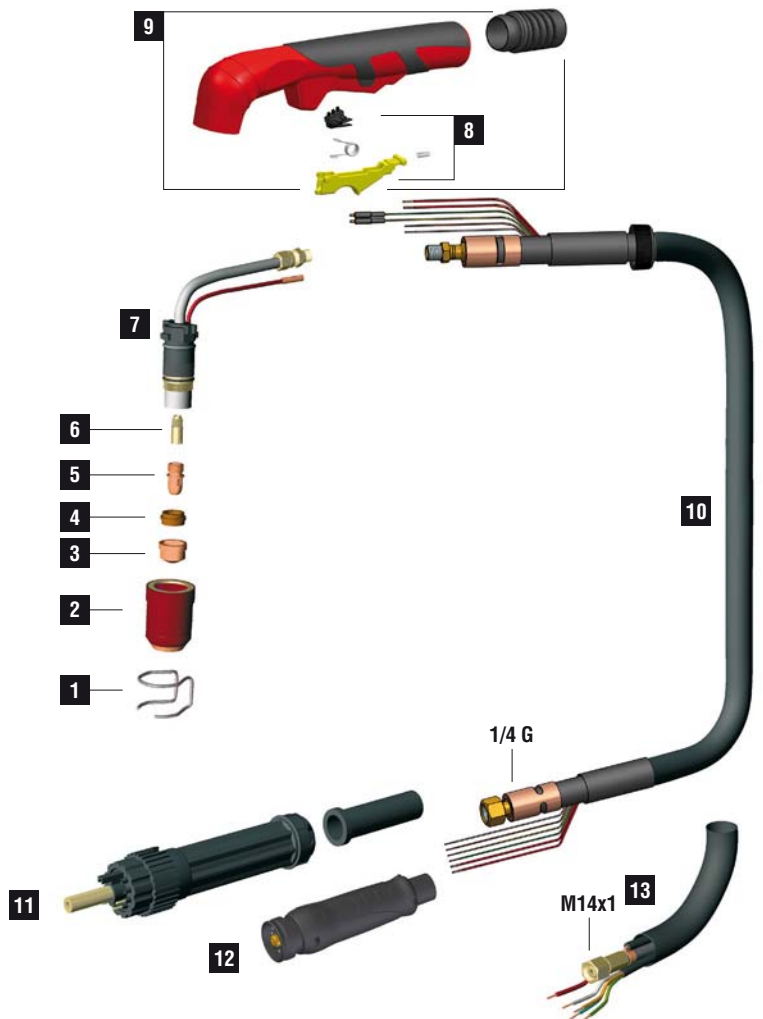

CODE	↔		📐
PAA206M-000-BA3	6 m	19.7'	1/4 GAS
PAA206M-004-BA3	6 m	19.7'	CENTRAL
PAA206M-082-BA3	6 m	19.7'	M14x1
PAA206M-304-BA3	6 m	19.7'	TRAFIMECTOR®

TECHNICAL DATA		
HF		
1 m	0,8 kg	1,76 lb
V PEAK	500	
5 bar		
180 l/min		
X 60%	100A	
X 100%	75A	
25÷30 mm		

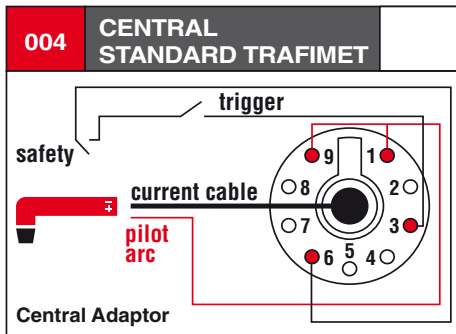

	CODE		Description	Ø	↔	CONTACT					DRAG		GOUGING	REF	
1	CV0008		plasma stand off guide		32,5 mm									51957	10
1	CV0009		plasma stand off guide		38,6 mm										10
1	CV0011		plasma stand off guide		23 mm									1386	10
1	CV0012		plasma stand off guide		30 mm									1408	2
1	CV0014		plasma stand off guide		30 mm										2
1	CV0021		plasma stand off guide	32,8 mm	40,6 mm										1
1	CV0023		plasma stand off guide		17,6 mm										10
1	CV0039		plasma stand off guide		18,5 mm										2
2	FH0297		for CV0039 CV0023												10
2	PC0109				44,1 mm										2
2	PC0111				44,1 mm										2
2	PC0113				42,3 mm										2
2	PC0130		long life		42,9 mm										2
3	PD0101-08		30 A	0,8 mm	.030"	13,7 mm								-	10
3	PD0101-11		60 A	1,1 mm	.043"	13,7 mm								-	10
3	PD0101-14		100 A	1,4 mm	.052"	13,7 mm								-	10
3	PD0101-17		130 A	1,7 mm	.066"	13,7 mm								-	10
3	PD0101-19		140 A	1,9 mm	.074"	13,7 mm								-	10
3	PD0101-30		gouging	3,0 mm	1/8"	13,7 mm								-	10
3	PD0111-12		80 A	1,2 mm	.045"	35,8 mm								-	10
3	PD0117-14		100 A	1,4 mm	.052"	34,8 mm								-	10
3	PD0117-17		130 A	1,7 mm	.066"	34,8 mm								-	10
3	PD0117-19		140 A	1,9 mm	.074"	34,8 mm								-	10
4	PE0101		plasma diffuser											-	2
4	PE0103		plasma diffuser											-	2
5	PR0101		plasma electrode		22 mm										10
5	PR0116		plasma electrode		43,1 mm										10
6	FH0562														10

CODE	
------	--

CODE	
------	--

7	EA0131		O-ring	10
7	PF0145		plasma torch head	1
8	TP0400		kit trigger	1
9	TP0402		handle kit	1
10	PH4108		6 m - 1/4 G	1

11	CY0002		cable support	1
11	FY0023		central adaptor	1
12	FY0090		TRAFIMECTOR®	1
13	PH4163		6 m - M14X1	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG



# ERGOCUT A 141



CE EN60974-7

CODE	↔		📐
PAA306M-000-BA3	6 m	19.7'	1/4 GAS
PAA306M-004-BA3	6 m	19.7'	CENTRAL
PAA306M-082-BA3	6 m	19.7'	M14x1
PAA306M-304-BA3	6 m	19.7'	TRAFIMECTOR®

TECHNICAL DATA		
HF		
1m	1,1 kg	2,43 lb
V PEAK	500	
5 bar		
210 l/min		
X 60%	140A	
X 100%	100A	
35÷40 mm		

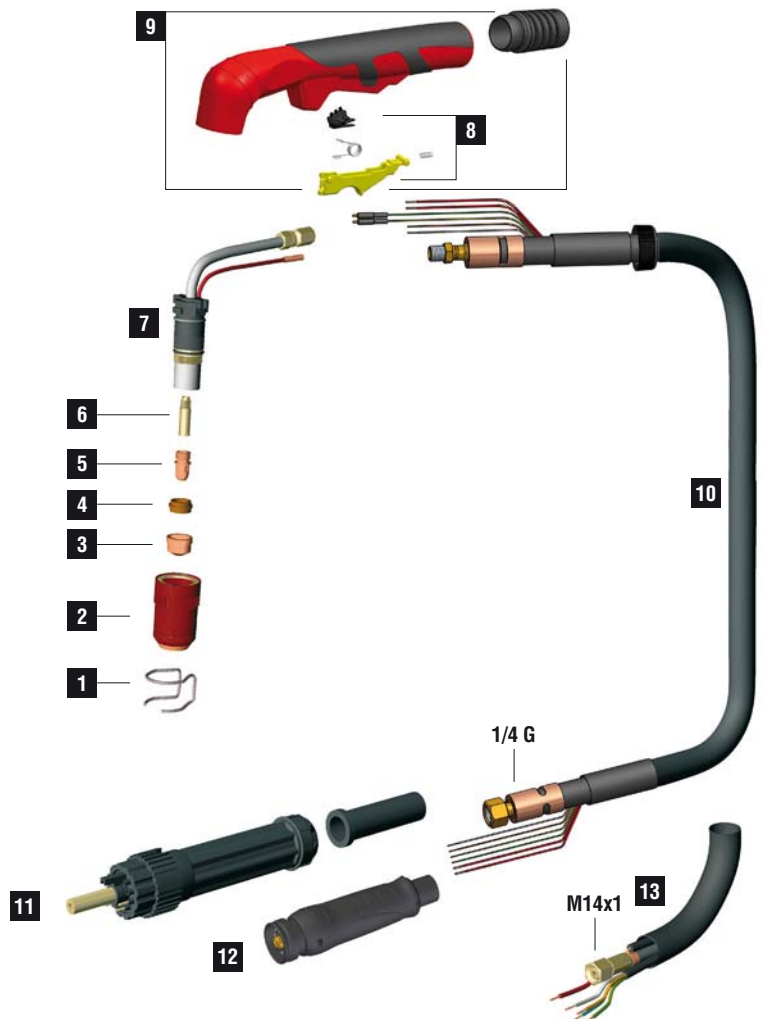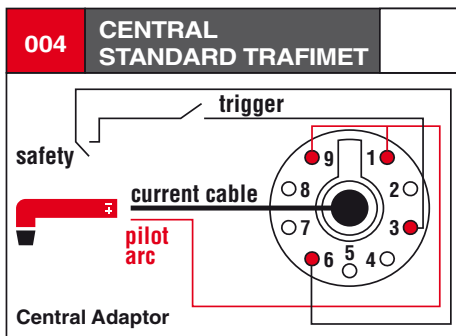

	CODE		Description	Ø	↔	CONTACT				DRAG		GOUGING		REF			
1	CV0008		plasma stand off guide		32,5 mm									51957	10		
1	CV0009		plasma stand off guide		38,6 mm										10		
1	CV0011		plasma stand off guide		23 mm	●									1386	10	
1	CV0012		plasma stand off guide		30 mm		●								1408	2	
1	CV0013		plasma stand off guide		33 mm								●		1406	2	
1	CV0014		plasma stand off guide		30 mm		●									2	
1	CV0021		plasma stand off guide	32,8 mm	40,6 mm			●								1	
1	CV0023		plasma stand off guide		17,6 mm								●			10	
1	CV0039		plasma stand off guide		18,5 mm				●							2	
2	FH0297								●				●			10	
2	PC0101		long life		52,1 mm	●	●	●	●				●			2	
2	PC0102				52,1 mm	●	●	●	●				●			2	
2	PC0103				50,3 mm				●			●				2	
2	PC0131		long life		50,9 mm				●	●		●	●			2	
3	PD0101-08		30 A	0,8 mm	.030"	13,7 mm	●	●	●	●	●					10	
3	PD0101-11		60 A	1,1 mm	.043"	13,7 mm	●	●	●	●	●						10
3	PD0101-14		100 A	1,4 mm	.052"	13,7 mm	●	●	●	●	●						10
3	PD0101-17		130 A	1,7 mm	.066"	13,7 mm	●	●	●	●	●						10
3	PD0101-19		140 A	1,9 mm	.074"	13,7 mm	●	●	●	●	●						10
3	PD0101-30		gouging	3,0 mm	1/8"	13,7 mm							●	●			10
3	PD0111-12		80 A	1,2 mm	.045"	35,8 mm				●						10	
3	PD0117-14		100 A	1,4 mm	.052"	34,8 mm							●			10	
3	PD0117-17		130 A	1,7 mm	.066"	34,8 mm							●			10	
3	PD0117-19		140 A	1,9 mm	.074"	34,8 mm							●			10	
4	PE0101		plasma diffuser				●	●	●	●	●		●	●		2	
4	PE0103		plasma diffuser				●	●	●	●	●		●	●		2	
5	PR0101		plasma electrode		22 mm		●	●	●	●			●	●		10	
5	PR0116		plasma electrode		43,1 mm					●			●			10	
6	FH0563						●	●	●	●	●		●	●		10	

	CODE		Description	Quantity
7	EA0131		O-ring	10
7	PF0155		plasma torch head	1
8	TP0400		kit trigger	1
9	TP0402		handle kit	1
10	PH4123		6 m - 1/4 G	1

	CODE		Description	Quantity
11	CY0002		cable support	1
11	FY0023		central adaptor	1
12	FY0090		TRAFIMECTOR®	1
13	PH4120		6 m - M14X1	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG

# AUTOCUT A 101P



CE EN60974-7




CODE	↔	
------	---	--











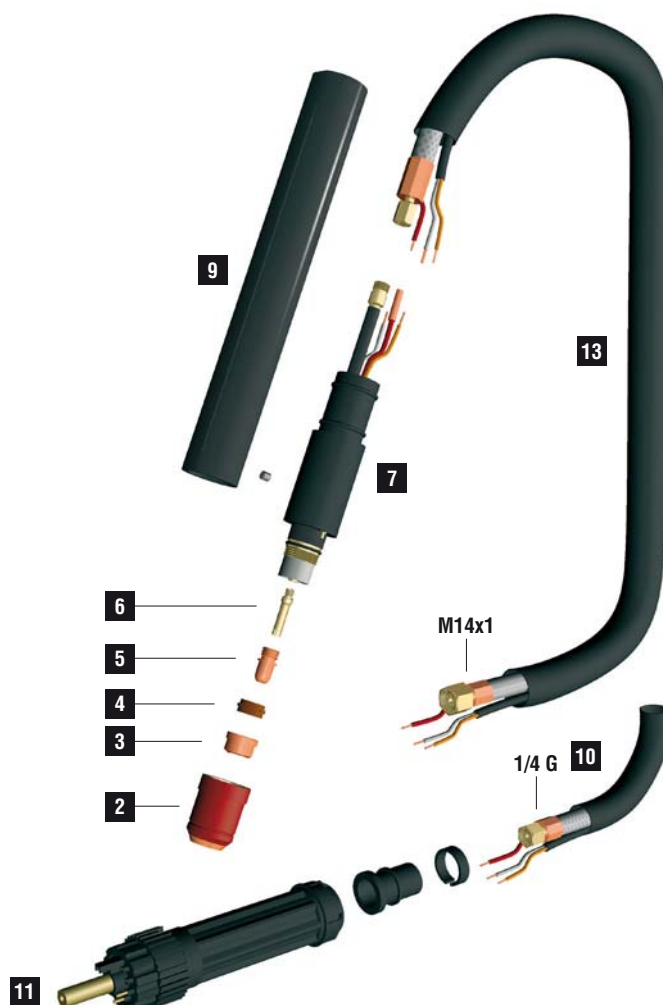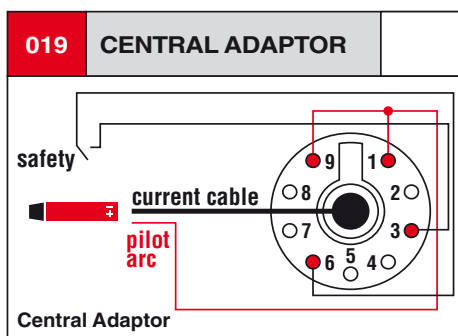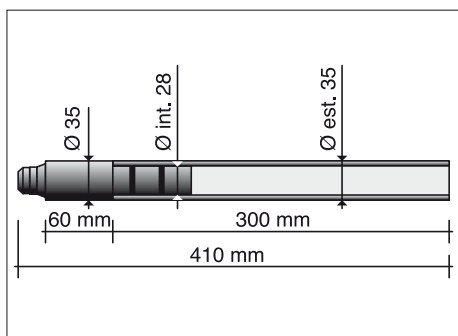








PA0110	6 m	19.7'	 M14x1
--------	-----	-------	-----------







PA0111	6 m	19.7'	 CENTRAL
--------	-----	-------	-------------






TECHNICAL DATA		
----------------	--	--

	HF	
	0,8 kg	1.76 lb
	500	
	5 bar	
	180 l/min	
	100A	
	75A	
	25÷30 mm	



	CODE		Ø		CONTACT		REF			
										
2	PC0111				44,1 mm				2	
3	PD0101-08		30 A	0,8 mm	.030"	13,7 mm			-	10
3	PD0101-11		60 A	1,1 mm	.043"	13,7 mm			-	10
3	PD0101-14		100 A	1,4 mm	.052"	13,7 mm			-	10
3	PD0101-17		130 A	1,7 mm	.066"	13,7 mm			-	10
3	PD0101-19		140 A	1,9 mm	.074"	13,7 mm			-	10
3	PD0101-30		gouging	3,0 mm	1/8"	13,7 mm			-	10
4	PE0101		plasma diffuser						-	2
5	PR0101		plasma electrode			22 mm				10
6	FH0562									10

	CODE	
7	EA0121	 O-ring 10
7	PF0115	 plasma torch head 1
9	TP0061	 1
10	PH0143	 6 m - 1/4 G 1
10	QB0097	 cover (mt) 100

	CODE	
11	CY0035	 cable support 1
11	CY0036	 ring 10
11	FY0023	 central adaptor 1
13	PH0142	 6 m - M14X1 1

STANDARD

 CONTACT SHORT

 CONTACT LONG




# AUTO CUT A 141P











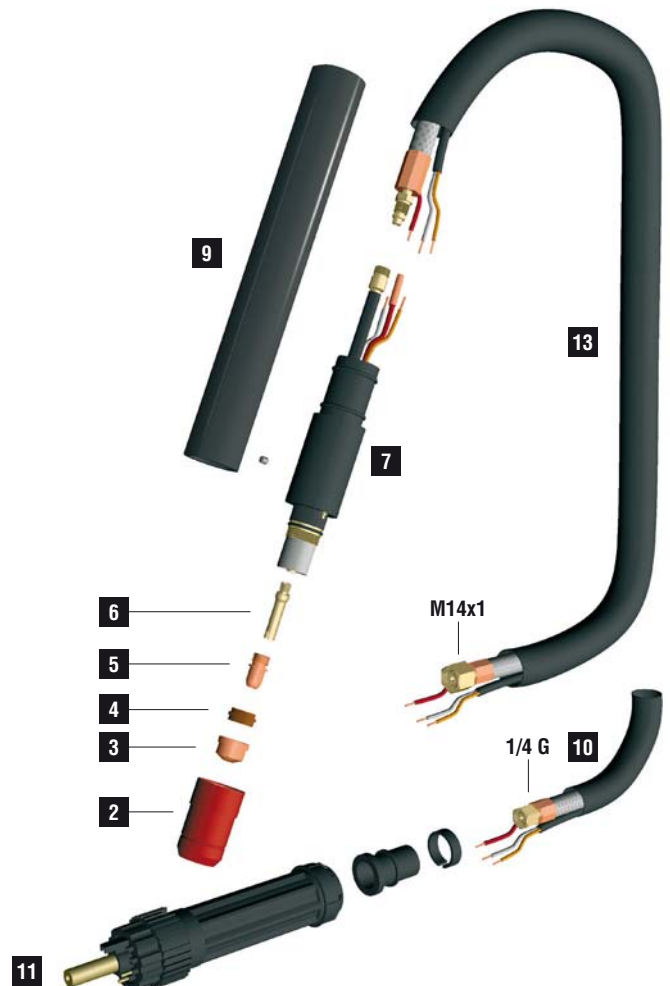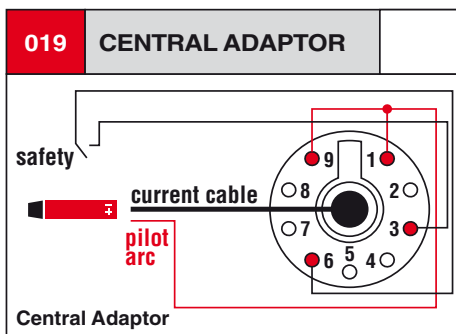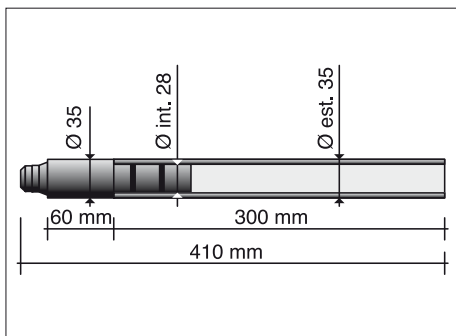

















CE EN60974-7








CODE	↔		
PA0103	6 m	19.7'	
PA0104	12 m	40'	
PA0145	6 m	19.7'	
PA0146	12 m	40'	

TECHNICAL DATA		
	HF	
	0,8 kg	1.76 lb
	500	
	5 bar	
	180 l/min	
	100A	
	75A	
	25÷30 mm	



	CODE		Ø		CONTACT		REF			
										
2	PC0102				52,1 mm				2	
3	PD0101-08		30 A	0,8 mm	.030"	13,7 mm			-	10
3	PD0101-11		60 A	1,1 mm	.043"	13,7 mm			-	10
3	PD0101-14		100 A	1,4 mm	.052"	13,7 mm			-	10
3	PD0101-17		130 A	1,7 mm	.066"	13,7 mm			-	10
3	PD0101-19		140 A	1,9 mm	.074"	13,7 mm			-	10
3	PD0101-30		gouging	3,0 mm	1/8"	13,7 mm			-	10
4	PE0101		plasma diffuser						-	2
5	PR0101		plasma electrode		22 mm					10
6	FH0563									10

	CODE	
7	EA0131	 O-ring 10
7	PF0102	 plasma torch head 1
7	PT0030	 repair kit 1
9	TP0061	 1
10	PH0149	 6 m - 1/4 G 1
10	PH0151	 12 m - 1/4 G 1

	CODE	
10	QB0164	 cover (m) 100
11	CY0035	 cable support 1
11	CY0036	 ring 10
11	FY0023	 central adaptor 1
13	PH0148	 6 m - M14X1 1
13	PH0150	 12 m - M14X1 1

STANDARD

 CONTACT SHORT

 CONTACT LONG